
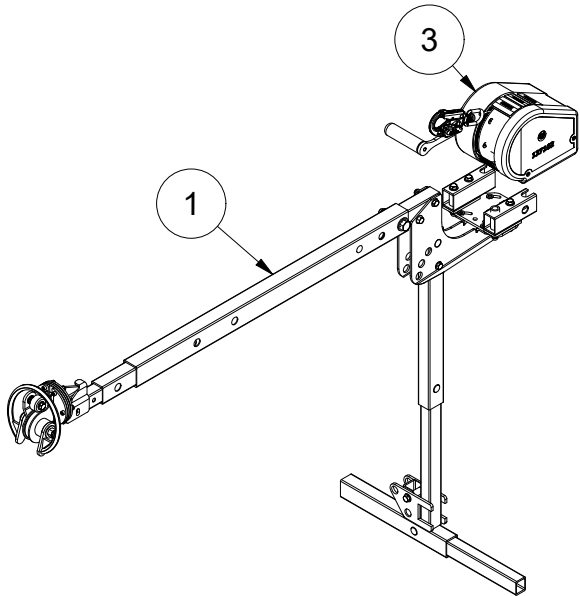
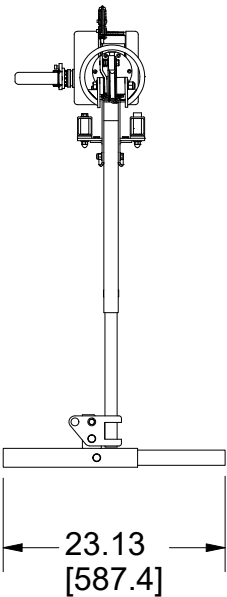
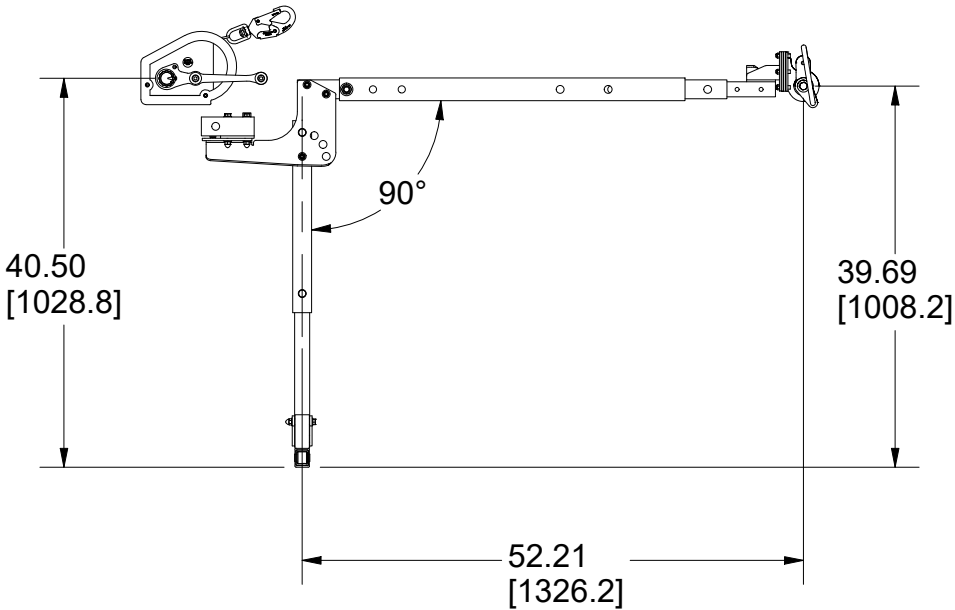


TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
.X± 0.040
.XX± 0.020
.XXX± 0.010
ANGLES± 1°

METRIC DIMENSIONS
TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
.X± 0.60
.XX± 0.30
ANGLES± 1°

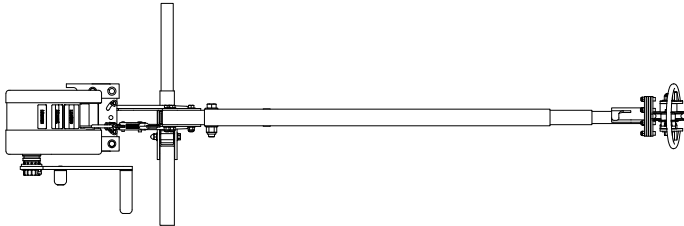

13	128082	1	Plate, 1/4 HRS (Winch Dble Mtg)
12	110502	4	Nut, 3/8 UNC Acorn Plttd
11	115741	4	Washer, 3/8 Internal Lock Plttd
10	123693	2	Spacer, 1/2 sch80 Alum (1.64oal, TK Mtg)
9	125912	2	Plate, 1/4 Alum (60200)
6	111674	4	Bolt, 3/8 x 3.00 UNC Grd 8 Plttd FT
5	111865	8	Washer, 3/8 Flat Plttd (SAE)
4	125913	2	Tube, #2 x 5.50 (TK Device Mtg, 60200)
3	60217	1	Best Hoist Winch Pro-1 w/ TK Bracket, 18-60-S5-3/16 w/ Snaphook
2	60162	1	Bracket, M/A Tuff-Klik #7 (Pole Hoist)
1	30041	1	Pro-1 Pole Hoist 5' to 7' (3 stage)
ITEM #	PART #	QTY	DESCRIPTION

Tuff Built Products Inc.

INVENTOR:			
DRAWN BY: rb	DATE: 14/07/2016	SCALE: NTS	DIMENSIONS: INCHES (mm)
CHECKED BY:	DATE:	APPROVED BY:	DATE:
PROJECT: 10403	DWG SIZE: A		REV #: 00
DESCRIPTION: Best Hoist Pro-1, Pole Hoist w/ 60 SS Winch		OF: 2	SHEET: 1
		DWG #:	20041
		PART #:	


Weight (est): 60.0 lbs (27.2 kgs)

Specifications are subject to change without notice.

REV #	DATE	DESCRIPTION OF REVISION	BY
-------	------	-------------------------	----

TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
.X± 0.040
.XX± 0.020
.XXX± 0.010
ANGLES± 1°

METRIC DIMENSIONS
TOLERANCES
(UNLESS OTHERWISE SPECIFIED)
.X± 0.60
.XX± 0.30
ANGLES± 1°

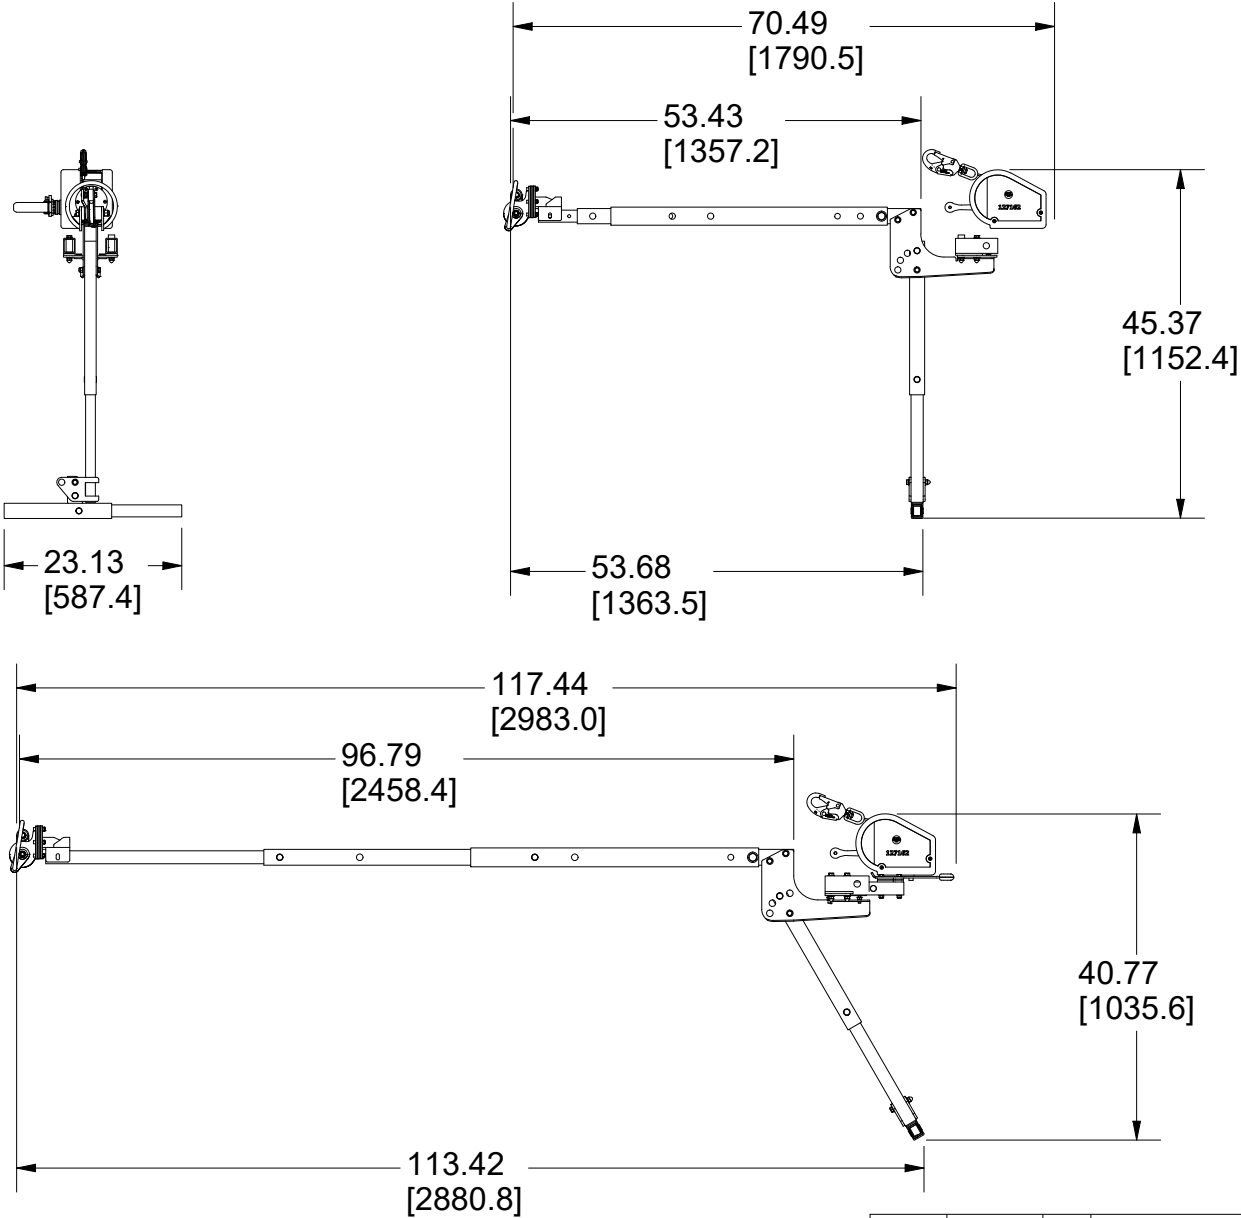

ITEM #	PART #	QTY	DESCRIPTION		
Tuff Built Products Inc.					
INVENTOR:					
DRAWN BY: rb		DATE: 14/07/2016	SCALE: NTS	DIMENSIONS: INCHES (mm)	
CHECKED BY:		DATE:	APPROVED BY:	DATE:	
PROJECT: 10403			DWG SIZE: A	REV #: 00	SHEET: 2 OF: 2
DESCRIPTION: Best Hoist Pro-1, Pole Hoist w/ 60 SS Winch			DWG #:	PART #: 20041	

REV #	DATE	DESCRIPTION OF REVISION	BY
-------	------	-------------------------	----